


KB2-052BR/SC-02

Pitch **0.80 mm** Length **3.55 mm**

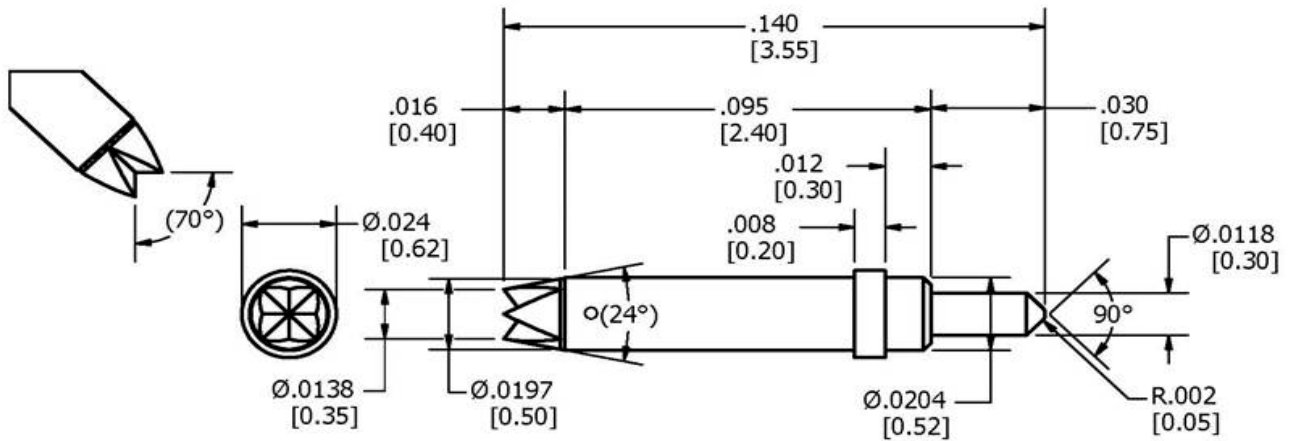

SPECIFICATIONS (Approximate Average Values)

Mechanical Specifications	Spring Force at Operating Travel	23gf ± 7gf @ 0.6mm stroke
	Operating Temperature	-40 °C to +140 °C
Electrical Specifications	Self Inductance	1.18nH
	Current Rating	3.6A
	DC Resistance	24.17 mΩ. Avg.
	Bandwidth	28.9GHz @ -1dB
Material and Finishes	Top Plunger (Stationary)	Hardened BeCu / Alloy Plated
	Bottom Plunger (Conical Tip)	Hardened BeCu / Au Plated
	Barrel	Alloy / Au Plated
	Spring	Stainless Steel / Au Plated

