


# KW1-028H/BR-05

Pitch **0.40 mm** Length **5.70 mm**

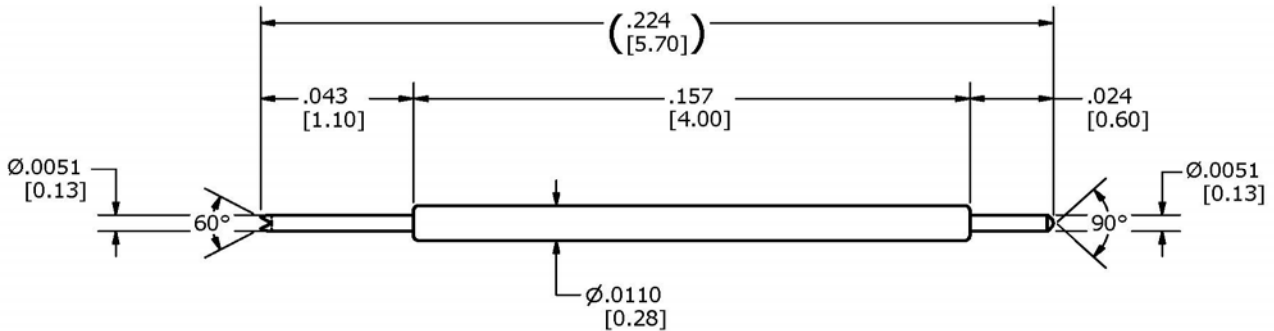

## SPECIFICATIONS (Approximate Average Values)

|                           |                                  |                                    |
|---------------------------|----------------------------------|------------------------------------|
| Mechanical Specifications | Spring Force at Operating Travel | 15gf $\pm$ 3gf @ 0.5mm stroke      |
|                           | Operating Temperature            | -40 $^\circ$ C to +120 $^\circ$ C  |
| Electrical Specifications | Self Inductance                  | 1.9nH                              |
|                           | Bandwidth                        | 25GHz @-0.1dB                      |
|                           | DC Resistance                    | Avg. 68 m $\Omega$ . / Avg +2stdv: |
|                           | Current Rating                   | 1.7A                               |
| Material and Finishes     | Top Plunger                      | Hardened BeCu / Au Plated          |
|                           | Bottom Plunger                   | Hardened BeCu / Au Plated          |
|                           | Barrel                           | Alloy / Au Plated                  |
|                           | Spring                           | Music Wire / Au Plated             |

