


KW1-020L/B-03 DATA SHEET

Pitch 0.30 mm Length 7.00 mm

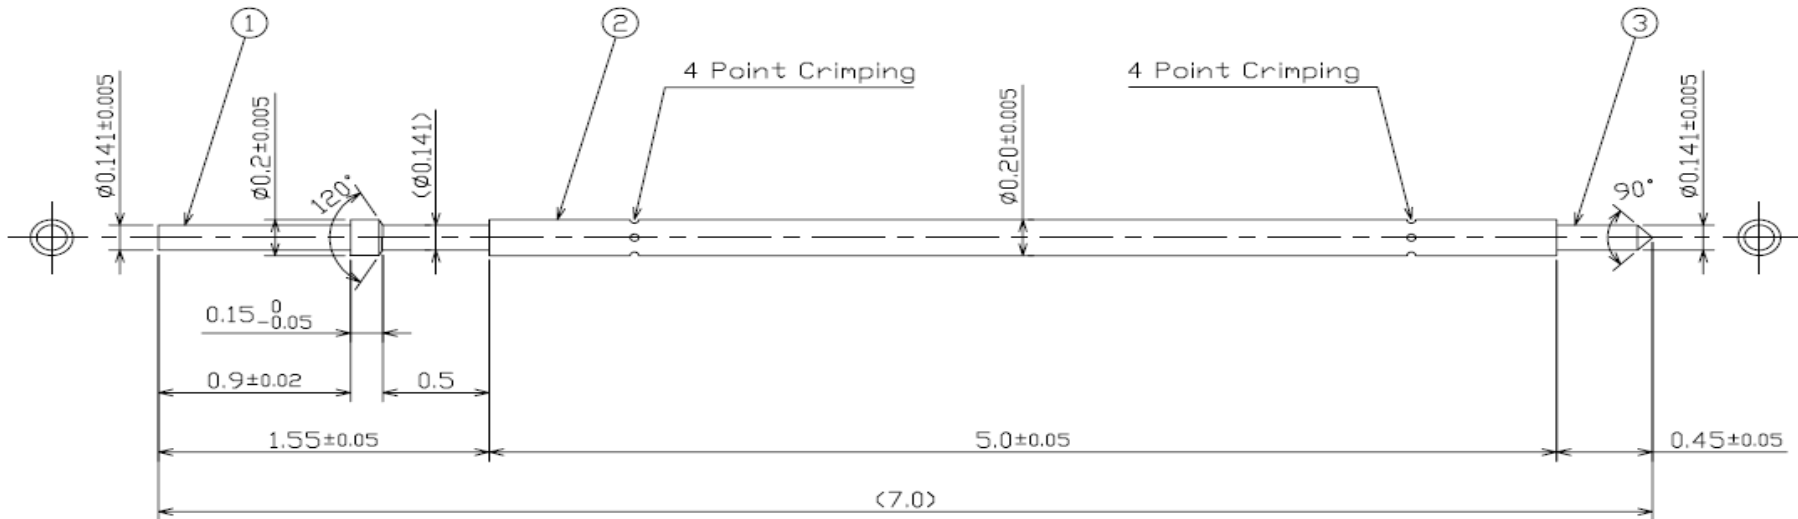

Mechanical Specifications	Spring Force at Operating Travel	20gf \pm 5gf @ 0.65mm stroke
	Pre Stroke (Recommended)	0.30 mm (Recommended)
	Maximum Stroke	Total Maximum Stroke is 0.8 mm 0.4mm Max Stroke for each plunger
	Operating Temperature	-40 $^\circ$ C to +150 $^\circ$ C
Material and Finishes	Plunger Item # 1	Hardened BeCu / Au Plated
	Barrel Item # 2	Alloy / Au Plated
	Plunger Item # 3	Hardened BeCu / Au Plated
	Spring	Stainless Steel / Au Plated